

ISOMEC

SANDWICH PANELS



LAM 5G



Standard



A1

A richiesta
On demand



Le caratteristiche principali della lamiera grecata Isomec sono quelle di essere robusta, facile da tagliare, resistente e di lunga durata. Il profilo moderno a 5 greche è adatto per svariate applicazioni per il rivestimento di coperture e pareti di edifici commerciali, industriali e residenziali. Estrema facilità di montaggio e rapidità di esecuzione. Costi di manutenzione ridotti.

Si consiglia una lunghezza massima dei pannelli non superiore a 6000 mm.

The main features of Isomec corrugated sheet are its toughness, the fact that it is easy to cut, its resistance and longevity. The modern profile with 5 corrugations is suitable for a wide range of applications for covering the roofs and walls of commercial, industrial and residential buildings. Extremely easy to assemble and quick to lay. Low maintenance costs.

We recommend the panel length does not exceed 6000mm.




Attenzione: Isomec si riserva il diritto di apportare, in qualunque momento senza preavviso, modifiche ai prodotti.
Warning: Isomec reserves the right to carry out modifications to the products at any time and with no prior notice.



Micronervature

Profile types

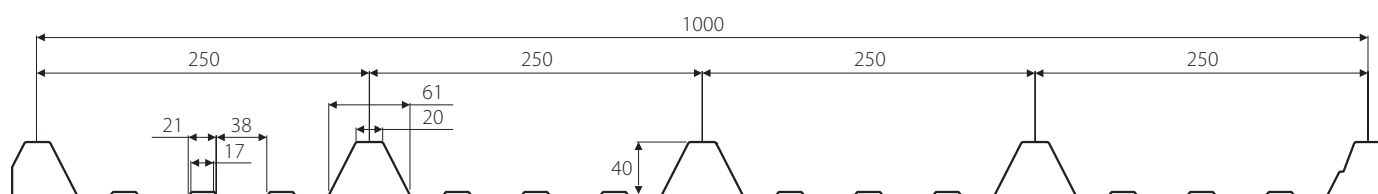

Sp. (mm)	0,5	0,6	0,7	0,8
J (cm ⁴ /m)	10,00	12,05	13,85	15,75
W (cm ³ /m)	4,75	5,80	6,70	7,75

LAM 5G	Standard	A richiesta – On demand
Finiture esterne - External finishin	5G	---
Superfici es erne External surface	Acciaio-Steel EN10346/Inox EN10088 Alluminio-Aluminium EN485	Granite-Color Farm/Plastisol/Aluzinc HDX/Z150 -200 -275 - PET - PVDF - PVC

Proprietà meccaniche Acciaio, Tolleranze dimensionali EN14509 - Mechanical Properties: Steel, Dimensional tolerances EN 14509													
Sp. (mm)	Peso Weight (kg/m²)	Sp. (mm)	L (m)										
				1,00	1,50	2,00	2,50	3,00	1,00	1,50	2,00	2,50	3,00
				Portata Max Load P=kg/m²	0,5	4,90	0,5	460	200	115			560
0,6	5,90	0,6	560		245	130	70		680	300	165	100	65
0,7	6,90	0,7	660		290	150	80	45	850	375	200	130	80
0,8	7,90	0,8	760		340	180	90	55	1000	445	245	150	100

I dati riportati sono puramente indicativi. Rimane responsabilità del progettista, in fase di calcolo, effettuare le verifiche necessarie. Per maggiori informazioni contattare Isomec.
 Technical data are to be considered as purely indicative. They can not replace the project calculation made by a qualified technician who will apply the rules in force in the referring market. More info, please contact: Isomec.



Contacts

Contatti

Finance - Management

Amministrazione

Viale del lavoro 19, Z.I. Paludi

Alpago (BL)

Ph. +39 0437 989105

Fax +39 0437 989198

www.isomec.it

Sales - Logistics

Uffici - commerciali - Logistica

Viale del lavoro 19, Z.I. Paludi

Alpago (BL)

Ph. +39 0437 989105

Fax +39 0437 989198

www.isomec.it

Production and registered office

Produzione e sede legale

Viale del lavoro 31, Z.I. Paludi

Alpago (BL)

Ph. +39 0437 989206

Fax +39 0437 982084

www.isomec.it

Mail:

Information - Informazioni:

isomec@isomec.it

Finance - Amministrazione:

amministrazione@isomec.it

Accounting - Contabilità:

contabile@isomec.it

Sales - Vendite:

commerciale@isomec.it

Logistics - Logistica:

spedizioni@isomec.it

Production - Produzione:

produzione@isomec.it