




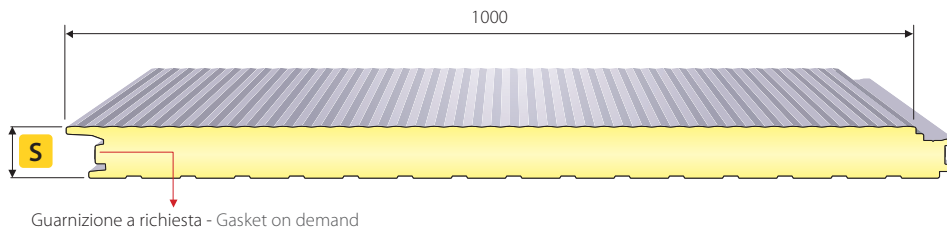


ISOMECC
SANDWICH PANELS






Standard	 	A richiesta all'ordine At request at the order	  
----------	---	---	---



In molti casi il valore estetico di una parete è importante. Isomec coniuga la bellezza di una parete architettonica realizzata con il fissaggio nascosto alle costruzioni modulari. L'ancoraggio dei pannelli avviene tramite un particolare incastro. Giesse è disponibile con finitura superficiale diamantata. Il particolare giunto a scomparsa di questo pannello, garantisce prestazioni di tenuta meccanica e di isolamento superiori a qualsiasi altro prodotto; la microrigatura diamantata esterna del pannello valorizza l'aspetto estetico.


The aesthetic effect of a wall is often important. Isomec combines the beauty of an architectural wall created by hidden fixings with the practical advantages of modular construction. The panels are anchored by special joints. Giesse is available with a diamond-pattern surface finish. This panel's special hidden joints guarantee higher performance in terms of mechanical hold and insulation than any other product. The micro-grooved external diamond pattern enhances the aesthetic effect.

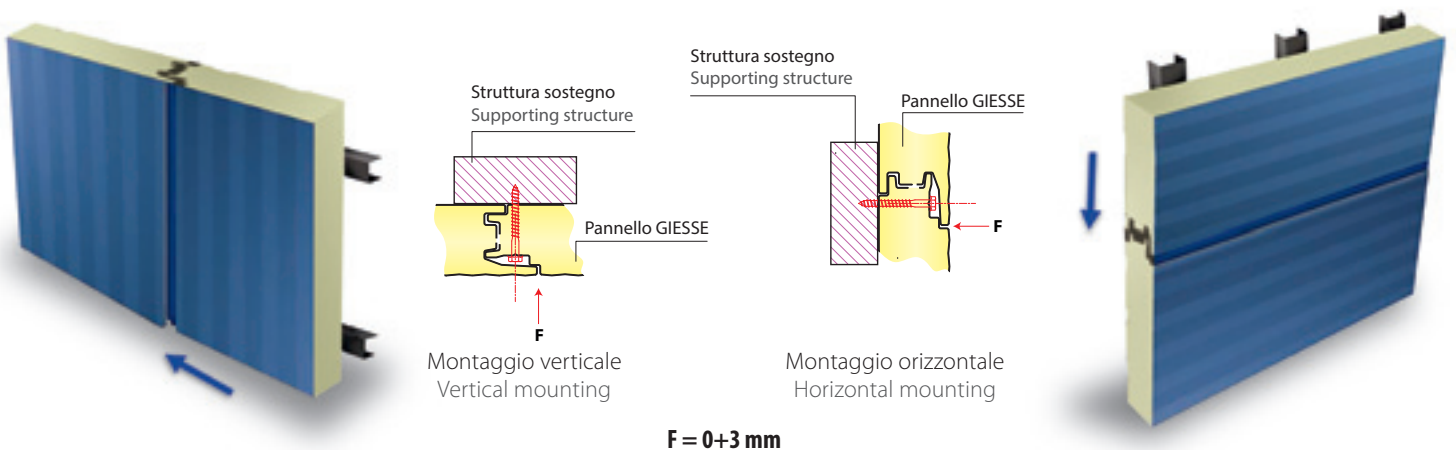




Micronervature


Profile types

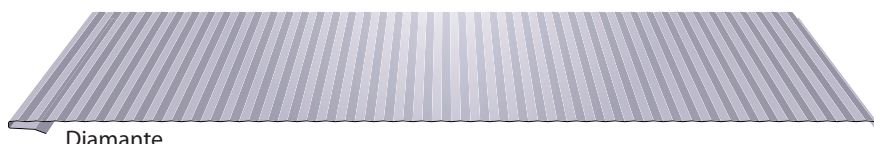

Diamante

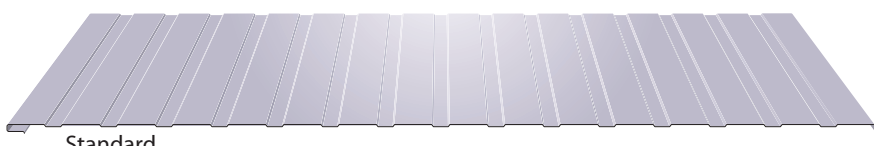

Standard

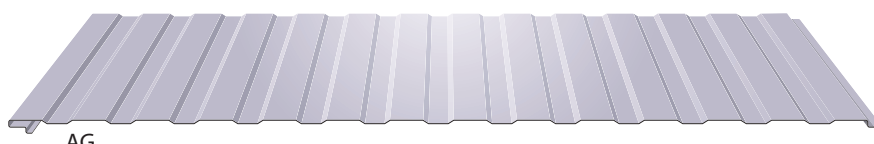

AG

GIESSE	Standard	A richiesta – On demand
Finiture esterne - External finishing	Diamante	Standard - AG - Doga - Box - Liscio
Finiture interne - Internal finishing	Box	AG - Doga - Standard - Liscio
Superfici esterne External surface	Acciaio-Steel EN10346/Inox EN10088 Alluminio - Aluminium EN485	Granite-Color Farm/Plastisol/Aluzinc HDX/Z150 - 275 - PET - PVDF - PVC
Isolanti - Insulating	PUR3	PUR2 - PIR - POLYISO - IPN

Proprietà meccaniche Acciaio, Tolleranze dimensionali EN14509 - Mechanical Properties: Steel, Dimensional tolerances EN 14509															
S (mm)	Peso - Weight (kg/m ²) 0,5 + 0,5 mm	K (W/m ² K)	L (m)	0,5 + 0,5 mm						0,6 + 0,6 mm					
				L						L					
				1,50	2,00	2,50	3,00	3,50	4,00	1,50	2,00	2,50	3,00	3,50	4,00
40	9,70	0,55	Portata Max Load P=kg/m ²	265	190	150	120	75		300	225	180	145	105	
50	10,10	0,44		330	250	195	155	115	80	380	280	225	190	160	110
60	10,50	0,37		395	295	235	190	140	105	450	340	270	230	190	150
80	11,30	0,28		535	395	320	260	190	140	610	455	370	305	260	205
100	12,10	0,22		585	505	400	325	240	180	650	570	460	380	325	255
120	12,90	0,19		600	520	410	335	245	185	665	585	470	390	335	265

The image shows the top part of a dark grey building facade under a blue sky. The word "METRON" is written in large, red, 3D block letters. The letter "O" is replaced by a white circle with a grey crosshair.

Contacts

Contatti

Finance - Management

Amministrazione

Viale del lavoro 19, Z.I. Paludi

32016 Alpago (BL)

Ph. +39 0437 989105

Fax +39 0437 989198

www.isomec.it

Sales - Logistics

Uffici - Commerciali - Logistica

Viale del lavoro 19, Z.I. Paludi

32016 Alpago (BL)

Ph. +39 0437 989105

Fax +39 0437 989198

www.isomec.it

Production and registered office

Produzione e sede legale

Viale del lavoro 31, Z.I. Paludi

32016 Alpago (BL)

Ph. +39 0437 989206

Fax +39 0437 982084

www.isomec.it

Mail:

Information - Informazioni:

isomec@isomec.it

Finance - Amministrazione:

amministrazione@isomec.it

Accounting - Contabilità:

contabile@isomec.it

Sales - Vendite:

commerciale@isomec.it

Logistics - Logistica:

spedizioni@isomec.it